

**Professional Camera Light
Small, Powerful & Versatile**

The Frezzi ProLight is the new standard in professional camera lights. Based on the industry's leading camera light, the Frezzi Mini-Fill, it retains all of the renowned features and adds today's must needed capabilities with the latest high-output LED technology.



**Amazing LED
75W Output**

New Features

Quick Release Head



The ProLight can be easily detached with the quick release feature. The low-profile base stays neatly wired to the camera body. The camera now fits neatly in camera bag.

Articulating Arm



ProLight's rugged aluminum articulating arm allows positioning at any desired height or forward location to avoid lens hood shadow.

USB Charge Port



The ProLight is the only camera light with a built in USB charging port that can charge any USB powered device from your camera battery.

Pass-Thru Power Tap




Allows connection of wireless or other broadcast device to the same Power Tap port as the ProLight.

Trusted Frezzi Features

- Output 5X Typical LED camera lights
- Full Spectrum 90+CRI
- Low Power Draw 8W
- Single Shadow
- Rugged and Weatherproof
- Compact Design/
Light weight 8oz.
- New Rugged Combo-Barn Door Filter Accessory
- Advanced dimmer control without color shift
- Upgradeable lamp change. Future-proof and hybrid accepts LED and Tungsten lamps

All Camera Mounting Hardware Included



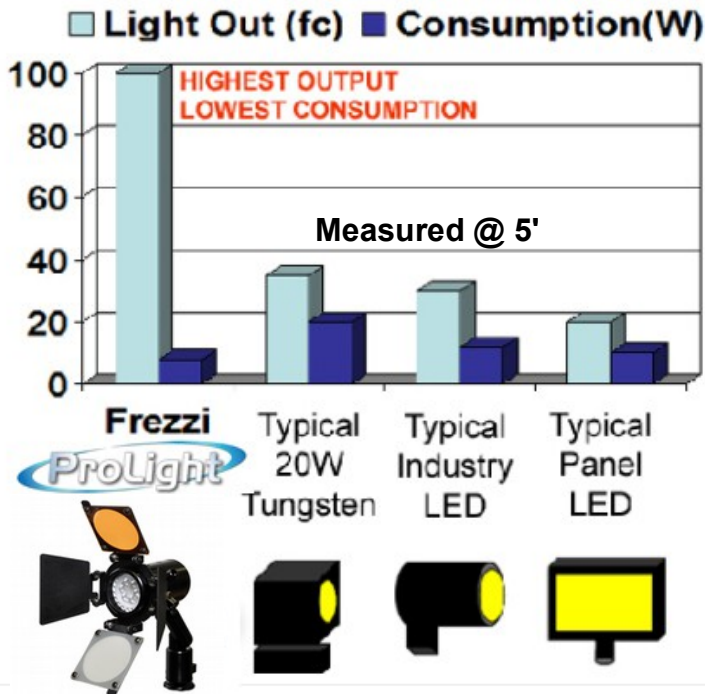

The Frezzi ProLight is machined from solid aircraft-grade aluminum and weather-proof that will provide years of reliable service.

Instant diffusion and accurate color change with flip down filters, eliminates imprecise dial adjustments while maintaining highest output and lowest power consumption.



Combo-Filter Accessories



ProLight PLPT-C
Combo-Filter PA-CTO



ProLight PLPT-W
Combo-Filter PA-CTB

Ordering Information

Item	Model	Description
91726	PLPT-C	COOL LED ProLight 5000K LEDCEX with Dual PT connector
91727	PLPT-W	WARM LED ProLight 3200K LEDWEX with Dual PT connector
91728	PLTK-T	20W TUNGSTEN ProLight 20W lamp with Dual PT connector

Accessories

96216	PA-CTO	Combo-Filter with 5000K to 3000K color changer, diffusion and 2 leaf BD for ProLight PLPT-C
96217	PA-CTB	Combo-Filter with 3000K to 5000K color changer, diffusion and 2 leaf BD for ProLight PLPT-W

Specifications


ProLight with 5000K LED75

Color Temp	3200K or 5000K Depending on Model
Light Output	100 ft-cd @ 5 feet
Beam Width	30 degrees
Lamp Life	25K Hours
Camera Mount	Cold shoe or 1/4-20
Tilt Angle	Full Adjustable
Size	3.5" x 5" x 2"
USB Charge	5V 2Amps
Weight	8 oz.
Socket Type	MR-16

Power Requirement

12-16VDC 2Amps Max

Included Female Shoe for Cameras with 1/4-20 thread

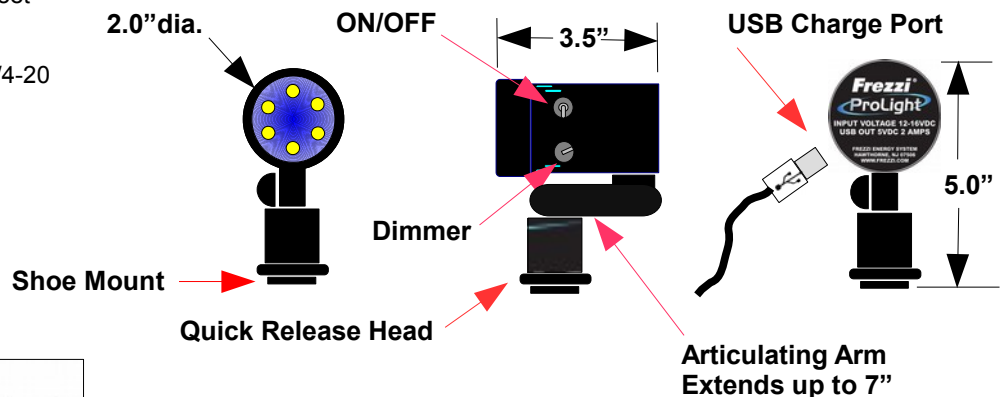

Specifications subject to change without notice (r15)

