

Frezzi®

Another Amazing
Frezzi Breakthrough!

SkyLight

Compact Portable LED with HMI Type Output

NEW



ALL WEATHER




High Intensity Daylight-Usable LED that Doesn't Fade in the Sun

Frezzi redefined high-output portable LED lighting with the revolutionary **HyLight**, now our advanced **SkyLight** delivers an impressive amount of daylight-balanced light suitable for indoor/outdoor news gathering and field production. It's a highly portable LED fixture powered by standard broadcast batteries, DC or AC power. Delivers equivalent light to a 650 Watt tungsten or 125W-150W HMI source while drawing only 75W of power. Fully dimmable with selectable beam angles using quick change reflector technology.


- **Ultra High Output** – 240 fc at 5' in flood, 640 fc at 5' in spot – Highest output in power class
- **Long Run Time** – 1 Hour with Frezzi FLB-100 battery, 2 Hours with Frezzi FLB-200 battery
- **Small & Compact** – Portable “Run & Gun” in complete travel-friendly single and dual head light kits
- **High Quality White Light** – High CRI single source 5600K daylight light without pixilation or color fringing
- **True Color Dimming** – 100% to 0 dimming without color shift
- **Wide Range Input** – 12 to 36 VDC, using A/B or V-Mnt. battery, 30V belts/power packs or AC power supply
- **Weatherproof and SAFE** - Usable in all weather conditions - No AC power required
- **Frezzi Durability** – All aluminum design built to Frezzi “industry work horse” standard. 50,000hr LED life
- **Silent Operation** – No fan with reliable passive cooling
- **Complete Accessories** – Barn doors, Filters and Softbox available

Photometrics

| Distance | 24° Spot | 50° Flood |
|----------|----------|-----------|
| 5 feet | 640 fc | 240 fc |

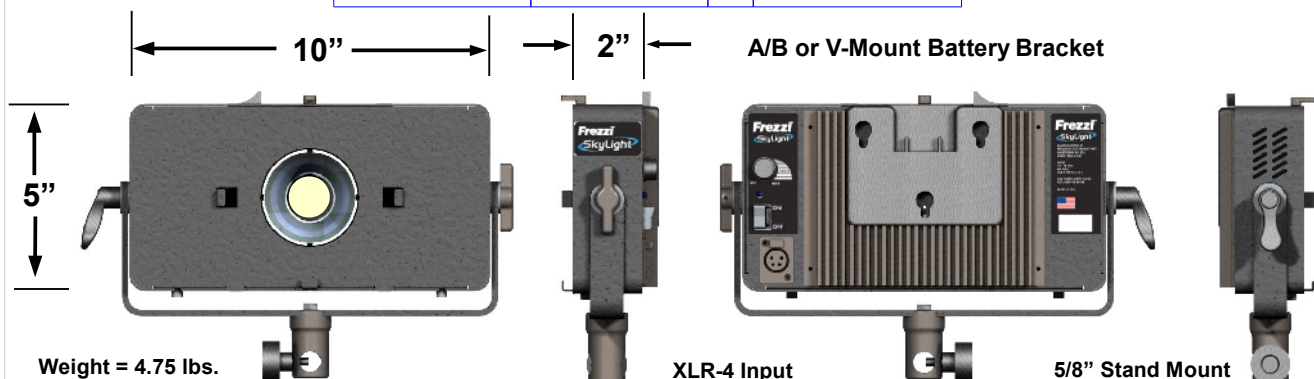

Output Comparison at 5 feet in foot-candles

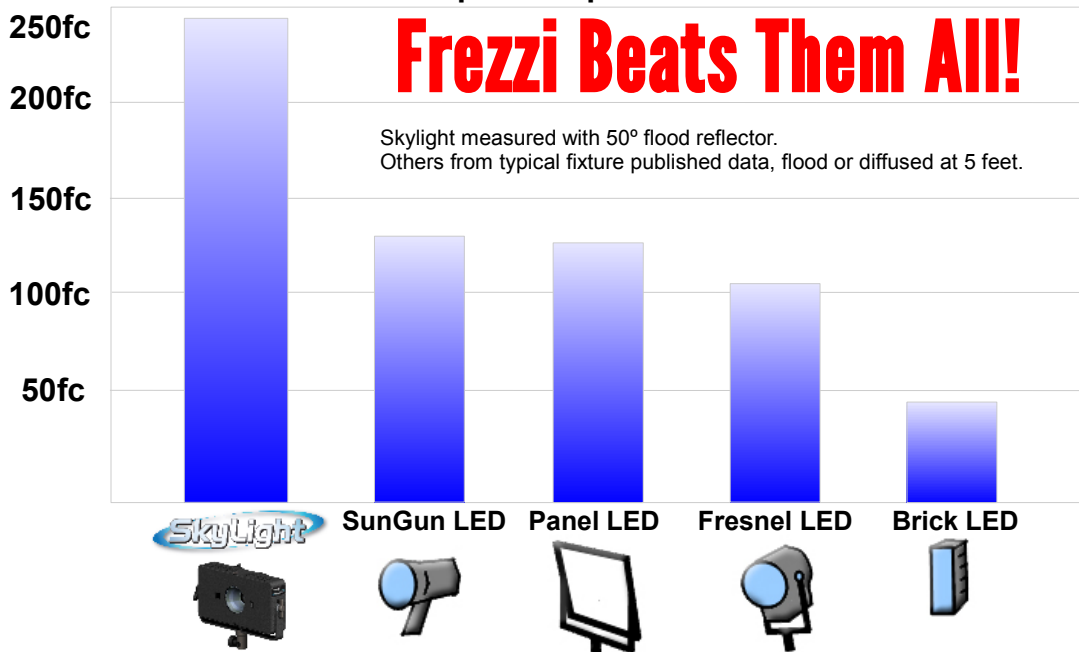

- Shoot Brighter!
- In ALL Weather!
- Shoot Longer!
- Travel with less!
- Quick Setup!

Made in USA

2 Year Warranty



During the "Biblical Flooding" event in Boulder Colorado the Frezzi lights worked for 5.5 hours in an incredible downpour before being given a break... provided us the ability to light this dangerous event and broadcast incredible images to our viewers while keeping the crew safe from electrical hazards. It also allowed the chief photographer to light as he needed to with full control over his lighting scheme. Major kudos to you and Frezzi for manufacturing a dominate lighting system capable of supporting the real world news environment.
~ Alan K. KOAA TV Colorado Springs

Includes rugged water tight travel case with pull handle and wheels.



SKYLIGHT KITS

SINGLE HEAD AC/DC AB Kit
Size 10.1 x 16x 24.3" Weight 24 lbs

Model SLK-1A Item 91068

QTY

1

DUAL HEAD AC/DC AB Kit
Size 10.5 x 17 x 22" Weight 44 lbs

Model SLK-2A Item 91060

2

TRIPLE HEAD AC/DC AB Kit
Size 14 x 18 x 29" Weight 55 lbs

Model SLK-3A Item 91064

3

ITEMS

| Name | Model |
|----------------------------------|---------|
| SkyLight with AB Bracket | SKY1A |
| Battery 100WHAB Mount | FLB-100 |
| Charger for Battery | FLC-1 |
| AC Power Supply, 90W | FPS-90 |
| Barn Door | SLBD |
| Mini-Heavy Duty Stand 7' | FHMS |
| Filter Pack | SLGP |
| Reflector, Spot 24° | SPT-R |
| Reflector, Flood 50° (installed) | SPT-F |

(SINGLE SLK-1A shown) V-mount, without batteries and custom kits available. Visit www.frezzi.com Call (800) 345-1030.

SkyLights and Accessories

| Model # | Item # | Description |
|---------|--------|---|
| SKY1A | 91717 | SkyLight High Intensity LED lamp with AB Battery Bracket |
| SKY1V | 91718 | SkyLight High Intensity LED lamp with V-Mount Battery Bracket |
| FHMS | 96236 | Mini Heavy Duty Stand 7' |
| FLC-1 | 93922 | Compact Travel Charger for all FLB series batteries |
| FLB-100 | 93900 | 100WH Battery with meter for A/B mount |
| FPS-90 | 95113 | Power Supply for SkyLight 15VDC 90W 90-240 VAC 50-60Hz XLR-4 |
| SLGP | 99021 | SkyLight Filter Pack (1) Diffuser, (1) Full CTO, (1) ½ CTO |
| SLBD | 99023 | Barndoor SkyLight |
| SLSB | 99022 | SkyLight Soft Box |
| SPT-R | 97130 | Reflector, Skylight 24° |
| FLD-R | 97131 | Reflector, Skylight 50° |

Frezzi Energy System

7 Valley Street • Hawthorne, NJ • 07506 • USA
www.frezzi.com • info@frezzi.com • Phone (973) 427-1160 • Fax (973) 427-0934